



# TAGLIAERBA

*professional* TS 650 - TS 750

Potenza e precisione di taglio anche su erba alta

*TS 650, TS 750 Lawnmower - Power and precision mowing, even with long grass*





# Progettati per i professionisti, ideali per tutti.

*Designed for professionals, ideal for everyone.*

I tagliaerba Cerruti serie TS, applicabili a qualunque tipo di motocoltivatore o motofalciatrice, sono stati progettati e costruiti per poter lavorare agevolmente in condizioni estreme: erba molto alta, presenza di arbusti, forti pendenze.

L'assorbimento di potenza che richiedono è minimo: questa caratteristica consente di utilizzarli con motocoltivatori di modesta potenza e di eseguire il lavoro in minor tempo.

Grande impegno è stato posto sul fronte della **sicurezza**: i tagliaerba Cerruti rispettano le più severe normative di sicurezza e sono dotati di un dispositivo automatico di frenatura della lama di taglio.

Robusti, affidabili e maneggevoli, dispongono di un sistema di regolazione dell'altezza di taglio a 4 posizioni, da 35 a 65 mm.

Inoltre, possono essere utilizzati nella versione con ruote - per lavori su terreni pianeggianti - oppure dotati di slitte, ideali nei terreni in pendenza.

*Cerruti series TS lawnmowers, for application to any type of powered cultivator or powered mower, have been designed and built to be able to work easily in extreme conditions: with very long grass, near bushes, on steep slopes.*

*They require a minimum amount of power, making them suitable for use with modest powered cultivators and capable of getting the job done quickly.*

*Considerable attention has been devoted to **safety**: Cerruti lawnmowers comply with the strictest safety standards and are equipped with an automatic braking device on the cutting blade.*

*Strong, reliable and manageable, they have cutting height regulation systems with 4 positions, from 35 to 65 mm.*

*Moreover, there is also a version mounted on wheels, suitable for use on flat land, and another equipped with runners, ideal for sloping land.*



## Dati tecnici

## Technical data

Modello	Model		TS 650	TS 750
Larghezza lavoro	Working width	mm	620	720
Peso	Weight	kg	52	64
Potenza richiesta*	Required power	Hp	6-11	9-15
Altezza di taglio	Cutting height	mm	35-65 (4 posizioni/positions)	

\*del motocoltivatore su cui installare il tagliaerba of the powered cultivator on which the lawnmower is to be installed

I dati riportati sono indicativi e non impegnativi. The data indicated is approximate and in no way binding.



TS 650



TS 750

### Caratteristiche tecniche


- Gruppo di rinvio angolare in ghisa
- Freno lama automatico
- Ruotalibera
- Regolazione dell'angolo di flangiatura (adatto quindi ad ogni modello di MTC)
- Basculamento longitudinale (per copiare al meglio il terreno)
- Ruote pivotanti regolabili e asportabili
- Slitte laterali regolabili (per lavorazioni in forte pendenza)

### Caratteristiche tecniche

- Cast iron corner transfer box
- Automatic blade brake
- Free wheel
- Regulation of the flange angle (therefore suitable for every model of powered cultivator)
- Longitudinal tilt (or better adherence to the land)
- Adjustable and removable pivoting wheels
- Adjustable lateral runners (for working on steep slopes)

Versione con slitte per terreni in pendenza  
Version with runners for sloping land



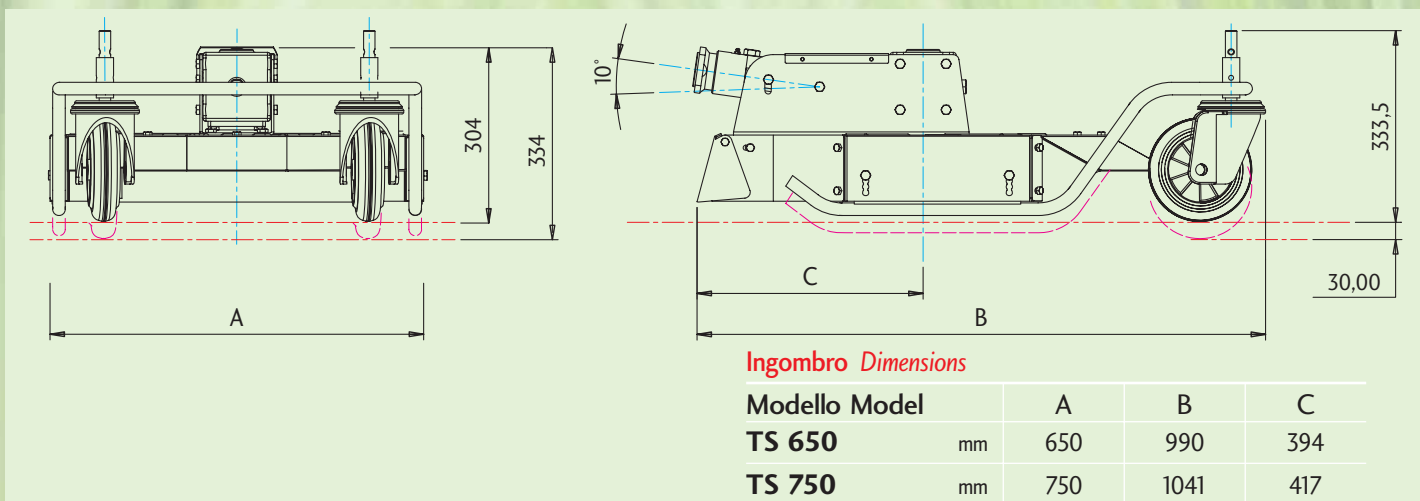

CERRUTI s.r.l.  
 via Statale 27/H - Reg. Noveiva  
 14033 Castell'Alfero (AT) - Italy  
 tel +39 0141 296957  
 fax +39 0141 276915  
 info@cerrutimacchineagricole.it  
 www.cerrutimacchineagricole.it

